


SUREGRAVE®

TECHNICAL SUPPORT SERVICE

Loading Firmware into a Dsc or Wizzard 2000

1. Enclosed is numerous files needed to upgrade your Dsc2000 or Wizzard 2000.
2. Create a folder called Dsc.
3. Copy the contents of the cd into this folder make sure there is no programs open and the machine is powered on.
4. Double click on the Install Dsc237, then double click FWLOAD1.BAT (for com 1) FWLOAD2.BAT (for com 2) this will open a dos page and your machine will now read loading firmware.

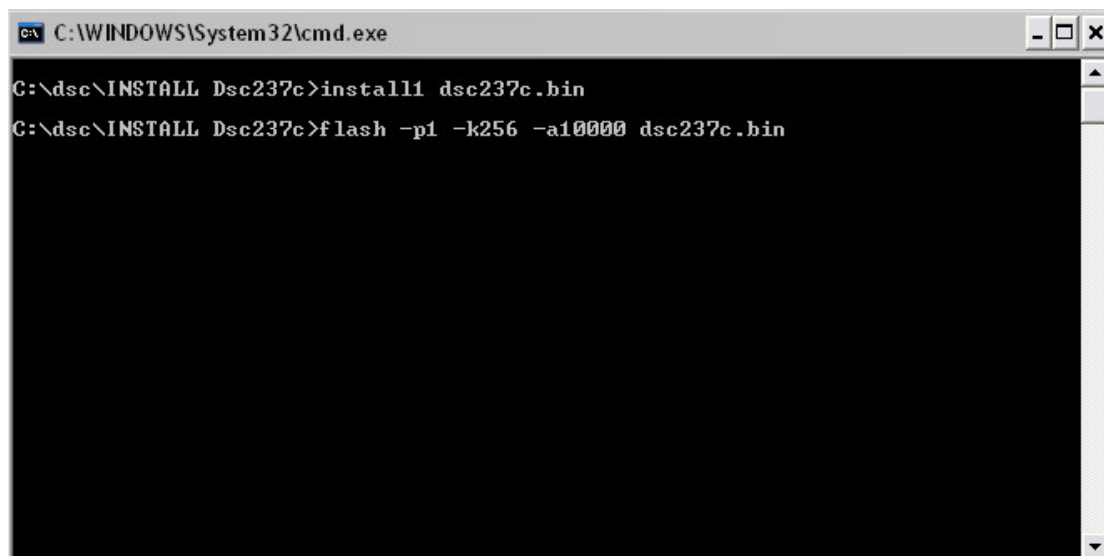

```
C:\WINDOWS\System32\cmd.exe
C:\dsc\INSTALL Dsc237c>install11 dsc237c.bin
C:\dsc\INSTALL Dsc237c>flash -p1 -k256 -a10000 dsc237c.bin
```

5. You will notice a percentage on the machine when this reaches 100% it is complete; the machine prompts you to reboot the machine.

<mailto:service@suregrave.com>

www.suregrave.com/technical.htm

SUREGRAVE[®]

TECHNICAL SUPPORT SERVICE

Loading The Table Driver

1. Use the folder called dsc, e.g. C:\DSC
2. Open the folder, which has your machine type.
3. Have the machine connected to the computer, and have the machine powered on.
4. If you are connected to Com 1 double click on load.bat.
5. If you are connected to Com 2 double click on load.exe.
6. This will load the data to the machine, the machine will prompt 'New config loaded', 'Press any key'. Press any key on the controller and this will reset.
7. The machine on boot up will now read TABLE= and the correct name for your machine.

<mailto:service@suregrave.com>

www.suregrave.com/technical.htm